

Dry Block Calibrators

Gemini

- 64 x 160mm Calibration Volume
- Two Models - 35°C to 550°C and 50°C to 700°C
- High Capacity Block or Large Removable Block
- PC Interface and Software

The Gemini family of Dry Blocks have high capacity allowing a large number of probes to be calibrated together. They are also suitable to accept large diameter probes with the block volume of a nominal 65 x 160mm.

Whilst the large block takes longer to heat and cool than the Jupiter 650 and Fast-Cal models it can calibrate thermocouples, resistance thermometers, thermostats and sensors that are too large for the smaller blocks.

Available with a fixed block with four 8mm and four 19.5mm pockets or the LRI version which has a removable block. With the LRI model blocks can be drilled to custom configurations.

The Gemini is available in two temperature ranges with each available as a BASIC(B) or SITE(S) variant. The B model includes a sophisticated temperature controller with a dual display for Set Temperature and Dry Block Temperature.

The S model additionally includes a built in digital indicator to which an external standard thermometer can be connected giving greater accuracy eliminating temperature gradient and loading errors. For lab accuracy the Gemini^{PLUS} can be used with a high-end temperature indicator such as one of the Isotech True Temperature Indicators (TTI).




<http://www.isotech.co.uk/industrial/>



Model - Gemini ^{PLUS}	550	700	550LRI	700LRI
Temperature Range	35°C to 550°C	50°C to 700°C	35°C to 550°C	50°C to 700°C
Absolute stability over 30 minutes	At 35°C At 250°C At 550°C At 700°C	±0.05°C ±0.05°C ±0.05°C ±0.05°C	At 35°C At 250°C At 550°C At 700°C	±0.02°C ±0.03°C ±0.04°C ±0.05°C
Computer Interface	Included with Software			
Cools from 550°C to 275°C from 550°C to 60°C	35 minutes 345 minutes	- -	132 minutes 420 minutes	- -
Heats from 30°C to 550°C from 50°C to 700°C	35 minutes -	- 110 minutes	60 minutes -	- 120 minutes
Best Performance	See Graph			
Calibration volume	Fixed 4 x 8mm pockets 4 x 19.5mm pockets All 160mm deep		Removable 64mm Dia x 160mm deep (Standard insert 8 x 8mm pockets All 154mm deep)	
Display Resolution	0.01 to 99.99 0.1 100.0 to 700.0 PC can display 0.01 across whole range with the software included			
Indicator units	°C, °F, K			
Voltage	100 to 120V (50 / 60 Hz) or 200 to 240V (50 / 60 Hz)			
Power	600 Watts		1000 Watts	
Dimensions	Height 302mm Width 176mm Depth 262mm			
Weight	8.5kg	14kg	8.5kg	18kg

Gemini

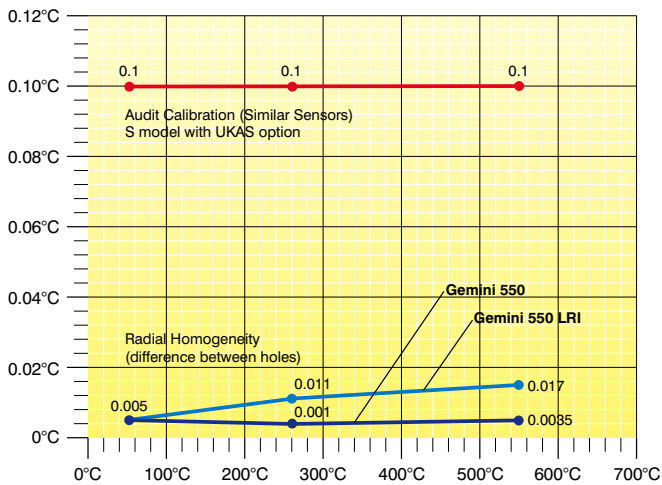

Calibration and Uncertainty

A certificate, traceable to National Standards, is included as standard. Recommended is an optional UKAS five-point calibration.

The accuracy will depend very much on the mode of use and the types of sensor to be used. Please contact Isotech for tutorials and uncertainty calculations and comprehensive evaluation reports. The Gemini^{PLUS} 550/700/500LRI/700LRI meet the Calibration Capacity requirements of EURAMET/cg-13/v.01, "Guidelines on the Calibration of Temperature Block Calibrators".



UKAS Calibration available for these systems - *International Traceability - Best Practice*

Accessories - Gemini



Metal Block Sleeves

Gemini^{PLUS} 550
Set of four Sleeves to suit the block. Optional single hole sizes 4, 6, 8, 10, 12, 14mm diameter all 150mm deep.

857-07-01 Undrilled sleeves for local machining.

857-07-03 1 sleeve with 2 holes 4.5mm x 150mm deep.

Gemini^{PLUS} 700
Set of four Sleeves to suit the block. Optional single hole sizes 4, 6, 8, 10, 12, 14mm diameter all 150mm deep.

857-07-02 Blank sleeves for local machining.

857-07-04 1 sleeve with 2 holes 4.5mm x 150mm deep.

Note: The use of sleeves will introduce an additional thermal gradient into the block. This can be avoided by using the LRI model with a block drilled for specific probes.



Removable Inserts

Gemini^{PLUS} 550 LRI

976-07-01a Included as Standard Removable insert with eight 8mm pockets

976-07-01b Blank Insert Insert without pockets for local machining



976-07-01c Custom Insert Contact Isotech with your requirements

Gemini^{PLUS} 700 LRI


976-07-02a Included as Standard Removable block with eight 8mm pockets

976-07-02b Blank Insert Insert without pockets for local machining

976-07-02c Custom Insert Contact Isotech with your requirements



UKAS Calibration
UKAS Calibration available to order, legally traceable in more than 70 countries.



UKAS Calibration
UKAS Calibration available to order, legally traceable in more than 70 countries.



Standard Probe

935-14-72/DB Platinum Resistance Thermometer for use up to 650°C.

935-14-63 Type N Thermocouple for use up to 700°C.



Standard Probe

935-14-72/DB Platinum Resistance Thermometer for use up to 650°C.

935-14-63 Type N Thermocouple for use up to 700°C.



Carrying Case

931-22-64 Purpose designed carrying case. Ideal for storing the calibrator and accessories




Carrying Case

931-22-65 Purpose designed carrying case. Ideal for storing the calibrator and accessories



Transit Case

931-22-105 Resin case with inline wheels and pull out handle. Ideal for transporting the calibrator



Transit Case

931-22-105 Resin case with inline wheels and pull out handle. Ideal for transporting the calibrator

How To Order

Specify Model, Version, Basic or Site, Supply Voltage, Accessories and if UKAS Calibration is required.